

Technical Document

FA 1238 23 B 22 M7B




June, 2013

specifications

parameters	units	specifications
phase		1
power supply	VAC	220/240
frequency	Hz	50/60
current	A	0.05/0.05
speed	RPM	2200/2200
power input	W	14/13
max. air flow	cfm	88/92
static pressure	inH2O	0.23/0.27
sound pressure level	dBA	41/45
operating temperature	°C	-20 ~ +80
life time	hours	60000 @20 °C
electrical interface		terminals or lead wires
blade material		die-casting magnesium alloy
housing material		die-casting magnesium alloy
bearing		ball bearings
motor protection		impedance protection
ingress protection		IP 55
dimensions	mm	120x120x38
unit weight	g	460

* The specifications listed above may change without prior notice.

dimensions

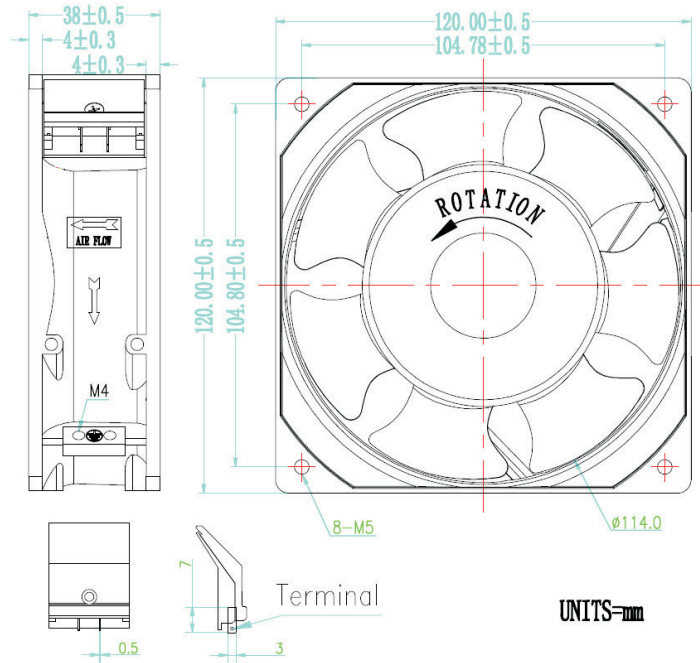

performance curve

