

FA 1338 27 series (127x127x38 mm)

Features

- Die cast magnesium frame
- Thermoplastic UL 94V-0 impeller
- Ball bearing (sleeve bearing version available)
- Electrical connections: lead wires
- Operating temp.: -20~+80 °C
- Life time: 60000 hrs@20 °C
- Impedance protection
- IP class: IP 55
- Weight: 460 g
- Certificates: CE




Model	Voltage VAC	Frequency Hz	Current A	Input Power (W)	Speed RPM	Airflow CFM	Static pressure (InH2O)	Sound level dBA
FA 1338 11 # 27	110/120	50/60	0.28/0.22	21/18	2700/3100	98/115	0.30/0.31	50/52
FA 1338 23 # 27	220/240	50/60	0.13/0.11	21/18	2700/3100	98/115	0.30/0.31	50/52

#: B: ball bearing; S: sleeve bearing


*: above specifications are subject to change without prior notice

** : for non-standard product, contact our sale's team at info@ventus-sa.com

Dimensions

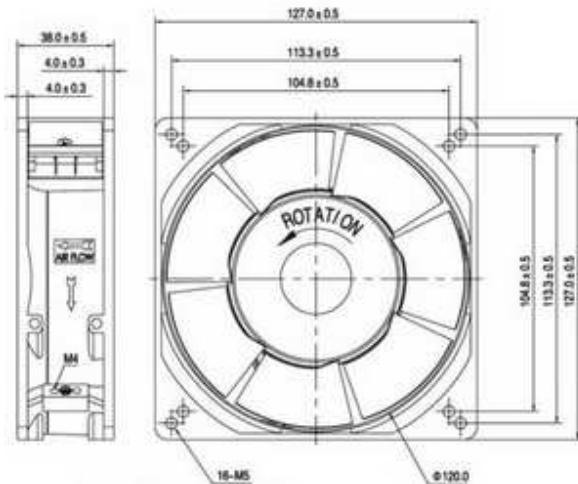

Performance

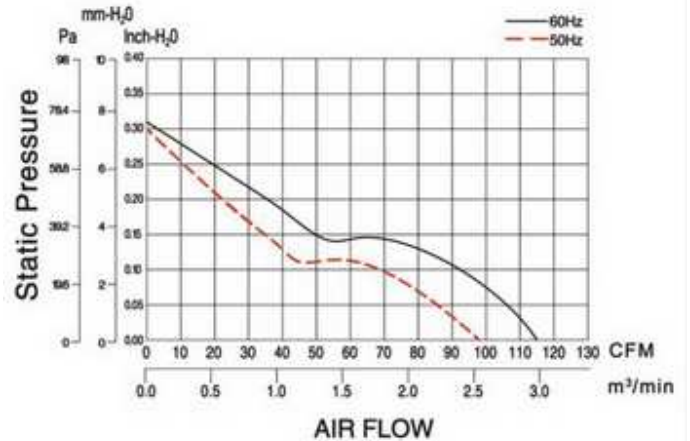

Ordering Code:

Fan type	Dimensions	Voltage		Bearing type		Speed	-	Electrical connections		Other specs*
		110	230	Ball	sleeve			Terminals	Lead wires	
FA	1338	11	23	B	S	27	-	C	L	/O

*: if the ordered item is not standard fans offered on our website, always put "/O" at the end of the ordering code and specify the project number which is unique for any non-standard products. Sales team will provide this project number together with specs sheet confirmed by both parties.

Example: FA1338 23 B 27-L