

FA 1438 24 series (135x135x38 mm)

Features

- Die cast Aluminum alloy frame
- UL94V-0 plastic impeller
- Ball bearing or sleeve bearing
- Electrical connections: terminals or lead wires
- Operating temp.: -10~+65 °C
- Life time: 50000 hrs@20 °C (ball bearing)
30000 hrs@20 °C (sleeve bearing)
- Impedance protection
- Weight: 550 g
- Certificates: CE




Model	Voltage VAC	Frequency Hz	Current A	Input Power W	Speed RPM	Airflow CFM	Static pressure mmH ₂ O	Sound level dBA
FA 1438 11 # 24	110/120	50/60	0.34	25	2400/2800	97/122	7.1/9.6	46/53
FA 1438 23 # 24	220/240	50/60	0.18	25	2400/2800	97/122	7.1/9.6	46/53

#: B for ball bearing and S for sleeve bearing. Refer to the ordering code below.


*: above specifications are subject to change without prior notice

** : for non-standard product, contact our sale's team at info@ventus-sa.com

Dimensions

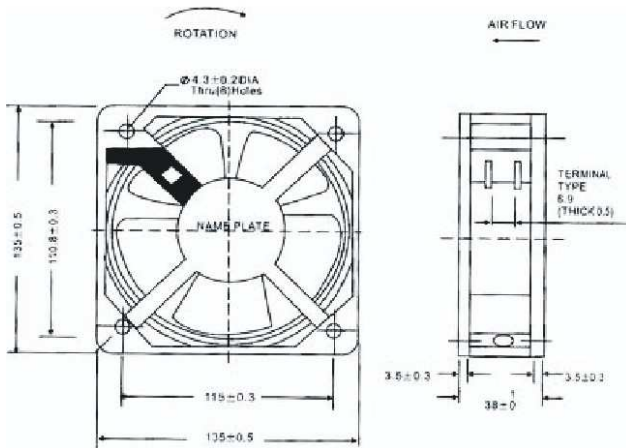

Performance

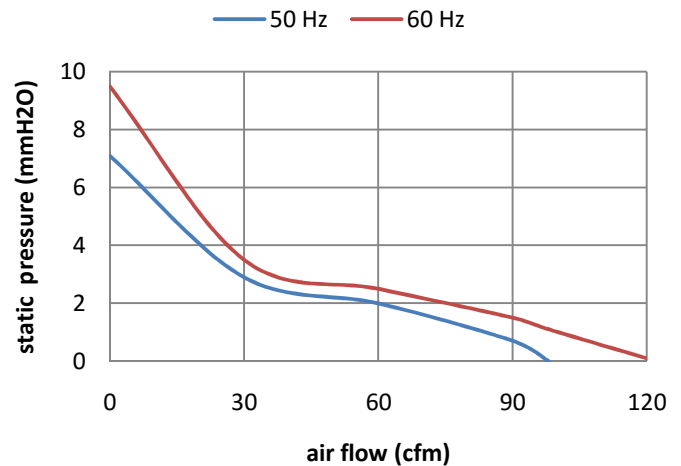

Ordering Code:

Fan type	Dimensions	Voltage (VAC)		Bearing type		Speed	Electrical connections		Other specs*
		110	230	Ball	sleeve		Terminals	Lead wires	
FA	1238	11	23	B	S	-	C	L	/O

*: if the ordered item is not standard fans offered on our website, always put "O" at the end of the ordering code and specify the project number which is unique for any non-standard products. Sales team will provide this project number together with specs sheet confirmed by both parties.

Example: FA 1238 23 B 29 -C