

FA 1738 28M series

(172x150x38 mm)

Features

- Die cast magnesium frame
- Die cast magnesium impeller
- Ball bearing
- Electrical connections: Terminals or lead wires
- Optional: with tachometer (5VDC or 12VDC)
- Operating temp.: -20~+80 °C
- Life time: 60000 hrs@20 °C
- Impedance protection
- IP class: IP 55
- Weight: 700 g
- Certificates: CE




Model	Voltage VAC	Frequency Hz	Current A	Input Power (W)	Speed RPM	Airflow CFM	Static pressure (InH2O)	Sound level dBA
FA 1738 11 B 28M	110/120	50/60	0.40/0.35	31/28	2800/3300	180/210	0.62/0.83	57/61
FA 1738 23 B 28M	220/240	50/60	0.20/0.17	31/28	2800/3300	180/210	0.62/0.83	57/61


*: above specifications are subject to change without prior notice

** : for non-standard product, contact our sale's team at info@ventus-sa.com

Dimensions

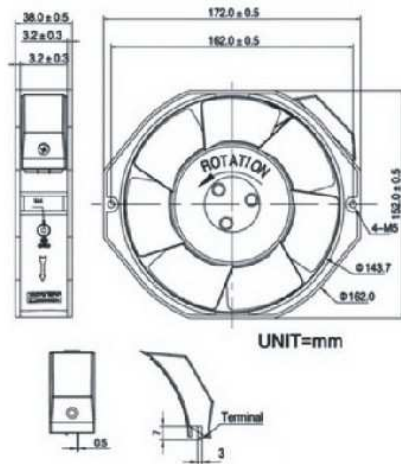

Performance

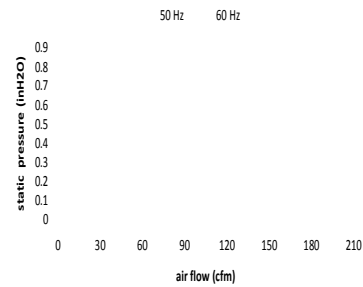

Ordering Code:

Fan type	Dimensions	Voltage		Bearing type		Speed	optional		Electrical connections		Other specs*	
		110	230	Ball	sleeve		Metal impeller	Tachometer	Terminals	Lead wires		
FA	1738	11	23	B	NA	28	M	T(5)/T(12)	-	C	L	/O

*: if the ordered item is not standard fans offered on our website, always put "/O" at the end of the ordering code and specify the project number which is unique for any non-standard products. Sales team will provide this project number together with specs sheet confirmed by both parties.

Example: FA 1738 23 B 28M-C