

FA 1755E 26M 7B series

(172x150x55 mm)

Features

- Die cast magnesium frame
- Die cast magnesium impeller
- Ball bearing
- Electrical connections: Terminals or lead wires
- Operating temp.: -20~+80 °C
- Life time: 60000 hrs@20 °C
- Impedance protection
- IP class: IP 55
- Weight: 960 g
- Certificates: CE




Model	Voltage VAC	Frequency Hz	Current A	Input Power (W)	Speed RPM	Airflow CFM	Static pressure (InH2O)	Sound level dBA
FA 1755E 11 B 26M 7B	110/120	50/60	0.48/0.44	45/42	2600/2900	190/210	0.55/0.62	55/58
FA 1755E 23 B 26M 7B	220/240	50/60	0.28/0.25	45/42	2600/2900	190/210	0.55/0.62	55/58
FA 1755E 38 B 26M 7B	380/400	50/60	0.20/0.18	46/43	2600/2900	190/210	0.55/0.62	55/58


*: above specifications are subject to change without prior notice

**: for non-standard product, contact our sale's team at info@ventus-sa.com

Dimensions

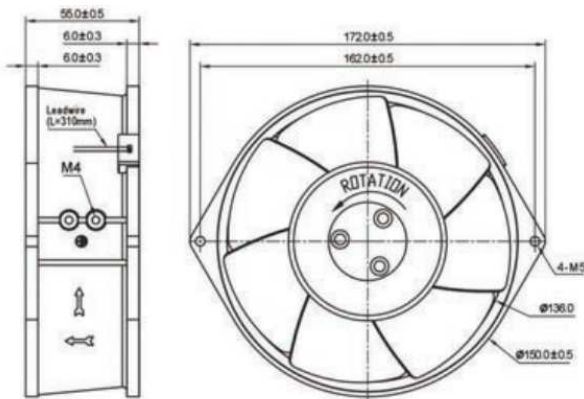

Performance

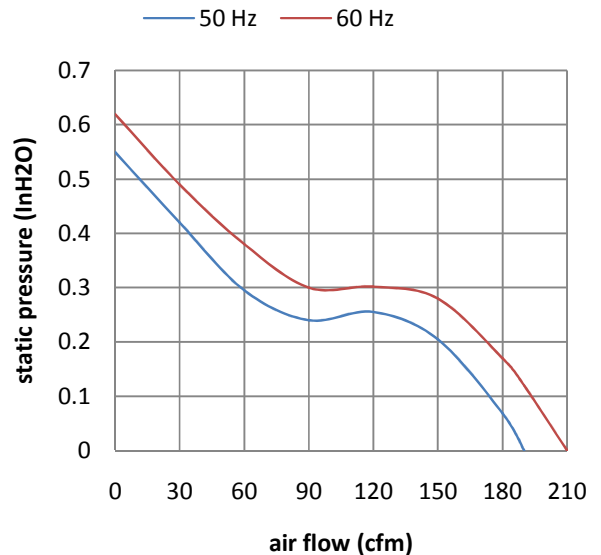

Ordering Code:

Fan type	Dimensions	Voltage			Bearing type		Speed	optional	Electrical connections			Other specs*
		110	230	380	Ball	sleeve			Terminal	-	Lead wires	
AC fans												
FA	1755E	11	23	38	B	NA	26	M 7B	-	NA	L	/O

*: if the ordered item is not standard fans offered on our website, always put "/O" at the end of the ordering code and specify the project number which is unique for any non-standard products. Sales team will provide this project number together with specs sheet confirmed by both parties.

Example: FA 1755E 23 B 26M7B-L