

## FA 1865 26M 7B series

(180x180x65 mm)

### Features

- Die cast magnesium frame
- Die cast magnesium impeller
- Ball bearing
- Electrical connections: Terminals or lead wires
- Operating temp.: -20~+80 °C
- Life time: 60000 hrs@20 °C
- Impedance protection
- IP class: IP 55
- Weight: 1450 g
- Certificates: CE




Model	Voltage VAC	Frequency Hz	Current A	Input Power (W)	Speed RPM	Airflow CFM	Static pressure (InH2O)	Sound level dBA
FA 1865 11 B 26M 7B	110/120	50/60	1.21/1.05	71/70	2600/2600	380/380	0.65/0.65	60/60
FA 1865 23 B 26M 7B	220/240	50/60	0.59/0.52	70/69	2600/2600	380/380	0.65/0.65	60/60
FA 1865 38 B 26M 7B	380/400	50/60	0.36/0.31	71/70	2600/2600	380/380	0.65/0.65	60/60


\*: above specifications are subject to change without prior notice

\*\* : for non-standard product, contact our sale's team at [info@ventus-sa.com](mailto:info@ventus-sa.com)

### Dimensions

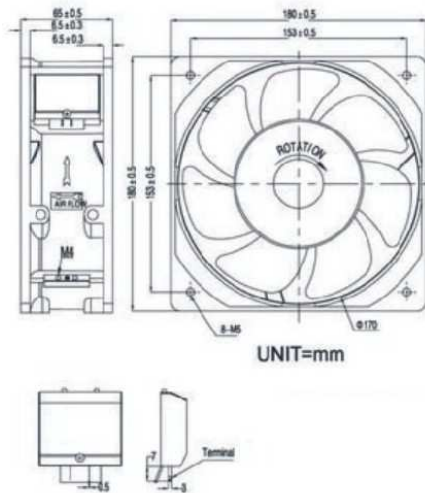

### Performance

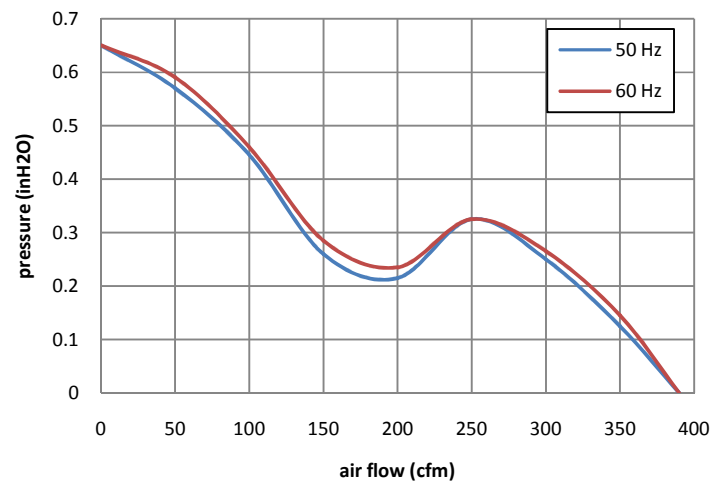

### Ordering Code:

Fan type	Dimensions	Voltage			Bearing type		Speed	optional	Electrical connections		Other specs*	
		110	230	380(3phases)	Ball	sleeve			Metal impeller	Terminals		Lead wires
FA	1865	11	23	38	B	NA	26	M (7B)	-	C	L	/O

\*: if the ordered item is not standard fans offered on our website, always put "/O" at the end of the ordering code and specify the project number which is unique for any non-standard products. Sales team will provide this project number together with specs sheet confirmed by both parties.

Example: FA 1865 23 B 26M7B-C