

FA 2172 29 M 7B series (208x208x72 mm)

Features

- Die cast magnesium frame
- Die cast magnesium impeller
- Ball bearing
- Electrical connections: Terminals or lead wires
- Optional: with tachometer (5 VDC or 12 VDC)
- Operating temp.: -20~+80 °C
- Life time: 60000 hrs @20 °C
- Impedance protection
- IP class: IP 55
- Weight: 2250 g
- Certificates: CE




Model	Voltage VAC	Frequency Hz	Current A	Input Power W	Speed RPM	Airflow CFM	Static pressure inH ₂ O	Sound level dBA
FA 2172 11 B 29M7B	110/120	50/60	0.70/0.90	81/115	2900/3400	950/1100	0.99/0.78	71/74
FA 2172 23 B 29M7B	220/240	50/60	0.38/0.50	81/115	2900/3400	950/1100	0.99/0.78	71/74
FA 2172 38 B 29M7B	380/400	50/60	0.18/0.18	81/115	2900/3400	950/1100	0.99/0.78	71/74


*: above specifications are subject to change without prior notice

**: for non-standard product, contact our sale's team at sales@ventus-sa.com

Dimensions

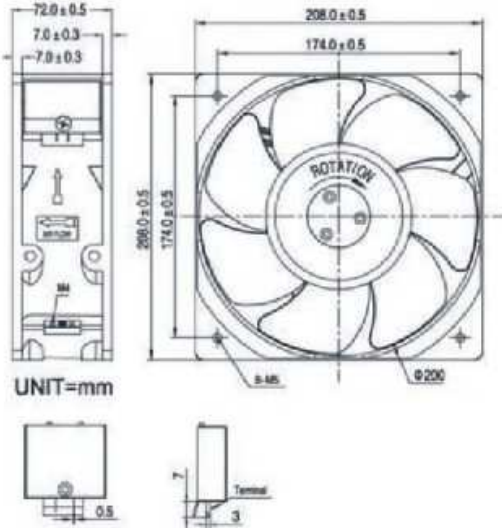

Performance

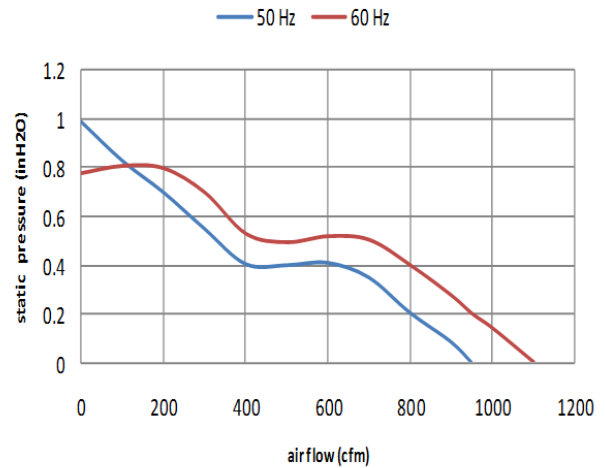

Ordering Code:

Fan type	Dimensions	Voltage (VAC)			Bearing type		Speed	optional			Electrical connections		Other specs*
		110	230	380	Ball	sleeve		Metal impeller	Tachometer	-	Terminals	Lead wires	
FA	2172	11	23	38	B	-	29	M7B	T	-	C	L	/O

*: if the ordered item is not standard fans offered on our website, always put "/O" at the end of the ordering code and specify the project number which is unique for any non-standard products. Sales team will provide this project number together with specs sheet confirmed by both parties.

Example: FA 2172 23 B 29 M7B-L