

FA 9238 25-M series

- magnesium alloy die-casting frame
- magnesium alloy die-casting impeller
- electrical connections: terminals
- sleeve bearing version available
- operating temp.: -20~+80 °C (ball bearing)
-10~+70 °C (sleeve bearing)
- unit weight ~ 330 g




model	voltage VAC	frequency Hz	power W	speed rpm	air flow cfm	sound level dBA
FA 9238 11 # 25M	110/120	50/60	15/14	2500/3000	40/50	37/41
FA 9238 23 # 25M	220/240	50/60	14/13	2500/3000	40/50	37/41

#: B: ball bearing; S: sleeve bearing

*: Contact Ventus sales team for the product availability with different air flow.

** : specifications listed above are subject to change without prior notice.

dimensions

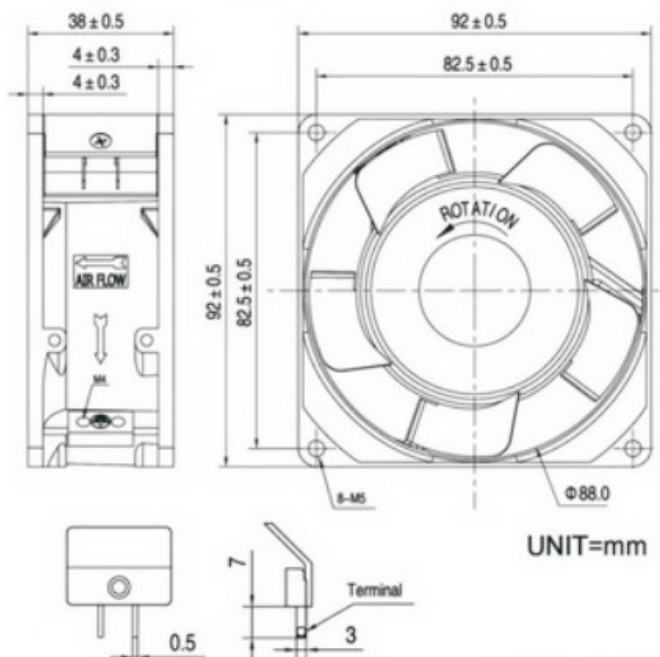

performance curves

