


CFX 40250 H4

Specifications:

voltage:	230 VAC/50 Hz
power:	15 ± 10% W
speed:	2050±150 rpm
max. air flow:	100 m ³ /h
noise:	≤ 48 dB
dielectric strength:	1800 VAC/1s
insulation class:	H
operating temp.:	-10~+80 °C
housing material:	galvanized steel
impeller material:	aluminum
motor type:	C-frame shaded pole motor
bearings:	sleeve bearing



Dimensions:

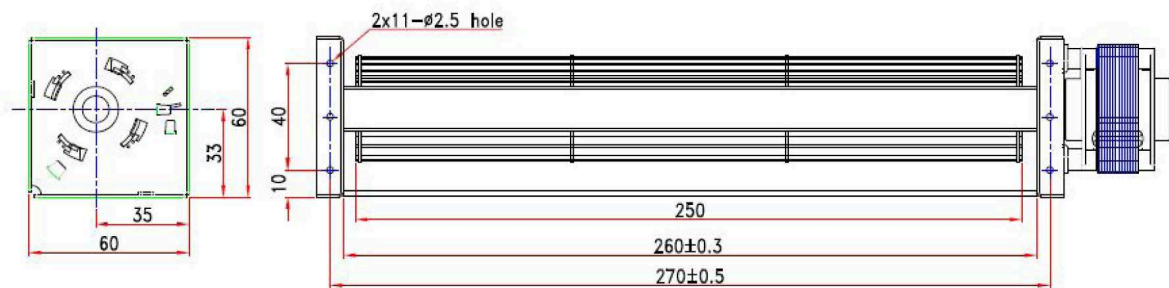

electrical connections*:

	High Speed	Low Speed
Black	X	X
Yellow		X
White	X	

*: Two speed mode is optional;
High speed is with the nominal speed;
Low speed is about 1700±150 rpm.

