
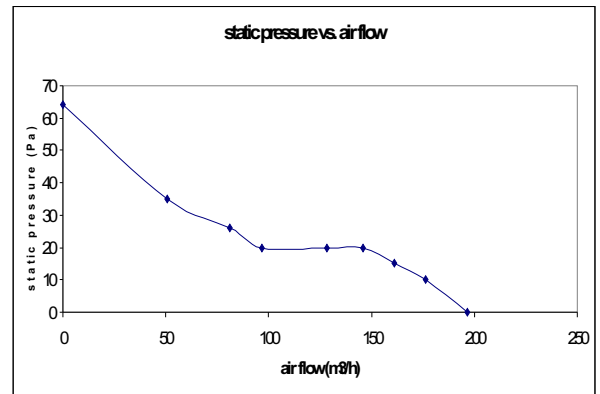


# CFX 45240 H4

## Specifications:

voltage:	230 VAC/50 Hz
current:	≤ 0.25 A
power:	≤ 32 W
speed:	≥ 2100 RPM
blow speed:	≥ 6.8 m/s (average)
max. air flow:	190 m <sup>3</sup> /h
start voltage:	≤ 170 VAC
noise:	≤ 48 dB
dielectric strength:	1800 VAC@1mA for 1s
insulation class:	B
operating temp.:	-10~+80 °C
housing material:	galvanized steel
impeller material:	aluminum
motor type:	C-frame shaded pole motor
bearings:	sleeve bearing

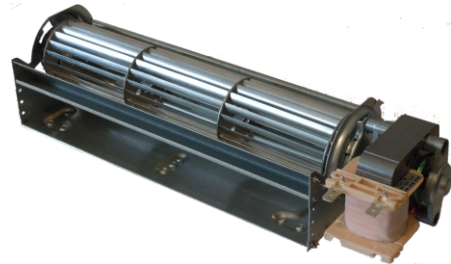

## Dimensions:

