
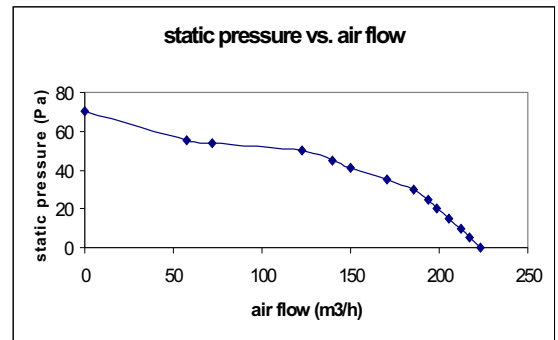


CFX 60240 H3

Specifications:

voltage:	230 VAC/50 Hz
current:	≤ 0.35 A
power:	≤ 45 W
speed:	≥ 2100±150 RPM
blow speed:	≥ 7.8 m/s (average)
max. air flow:	240 m ³ /h
start voltage:	≤ 150 VAC
noise:	≤ 48 dB
dielectric strength:	1800 VAC@1mA for 1s
insulation class:	B
operating temp.:	-10~+80 °C
housing material:	galvanized steel
impeller material:	aluminum
motor type:	C-frame shaded pole motor
bearings:	sleeve bearing

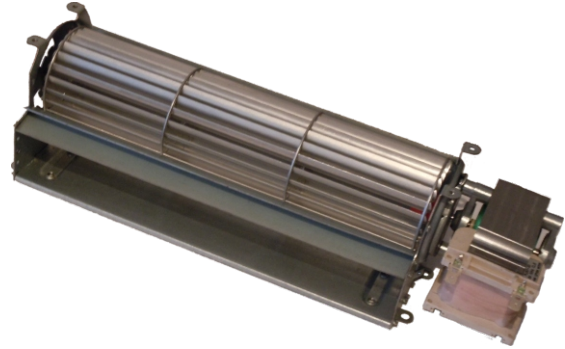

Dimensions:

