

FD 1238H B 30 series

Features

- Frame: Thermoplastic PBT UL 94V-0
- Impeller: Thermoplastic PBT UL 94V-0
- Ball bearing
- Lead wires
- Polarity protection
- Operating temp.: -20~+70 °C (ball bearing)
- 380 g




Model	Voltage VDC	Current A	Input Power (W)	Speed RPM	Airflow CFM	Static pressure (mmH2O)	Sound level dBA
FD 1238H 12 B 30	12	0.86	10.32	3000	158.12	12.36	54.3
FD 1238H 24 B 30	24	0.43	10.32	3000	158.12	12.36	54.3
FD 1238H 48 B 30	48	0.21	10.08	3000	158.12	12.36	54.3

#: B for ball bearing and S for sleeve bearing. Refer to the ordering code below.


*: above specifications are subject to change without prior notice

**: for non-standard product, contact our sale's team at info@ventus-sa.com

Dimensions

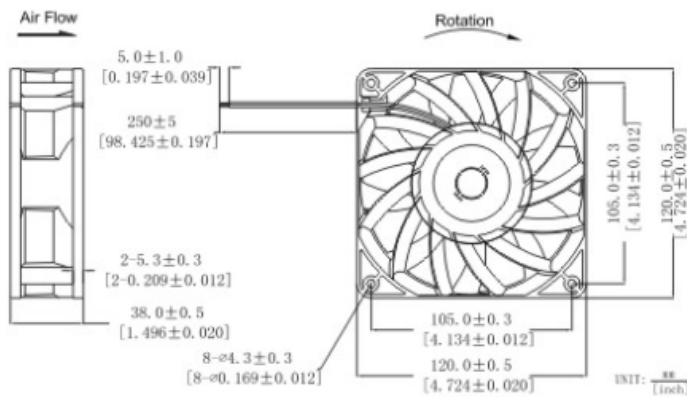

Performance

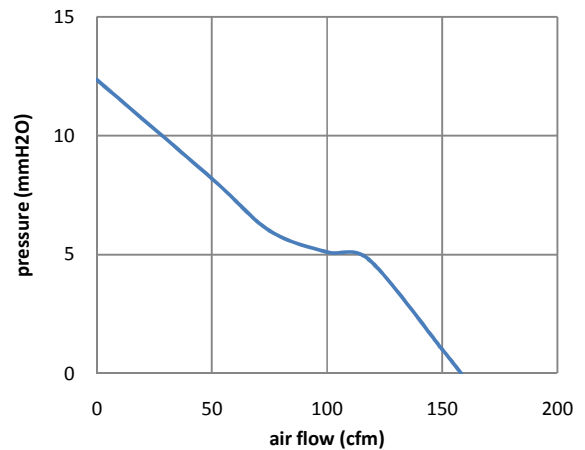

Ordering Code:

Fan type DC fans	Dimensions	Voltage	Bearing type		Speed	optional		-	Electrical connections		Other specs*
			Ball	sleeve		PWM	Tachometer		Terminals	Lead wires	
FD	1238	12/24/48	B	NA	30	P	T	-	NA	L	/O

*: if the ordered item is not standard fans offered on our website, always put "/O" at the end of the ordering code and specify the project number which is unique for any non-standard products. Sales team will provide this project number together with specs sheet confirmed by both parties.

Example: FD 1238 24 B 30-L