

FD 1238H B 40 series

Features

- UL 94V-0 plastic frame
- UL 94V-0 plastic impeller
- Ball bearing
- Lead wires
- Polarity protection
- Operating temp.: -20~+70 °C (ball bearing)
- 380 g




| Model | Voltage VDC | Current A | Input Power (W) | Speed RPM | Airflow CFM | Static pressure (mmH2O) | Sound level dBA |
|------------------|-------------|-----------|-----------------|-----------|-------------|-------------------------|-----------------|
| FD 1238H 12 B 40 | 12 | 1.86 | 22.32 | 4000 | 209.11 | 21.53 | 61.7 |
| FD 1238H 24 B 40 | 24 | 0.93 | 22.32 | 4000 | 209.11 | 21.53 | 61.7 |
| FD 1238H 48 B 40 | 48 | 0.46 | 22.08 | 4000 | 209.11 | 21.53 | 61.7 |

#: B for ball bearing and S for sleeve bearing. Refer to the ordering code below.


*: above specifications are subject to change without prior notice

**: for non-standard product, contact our sale's team at info@ventus-sa.com

Dimensions

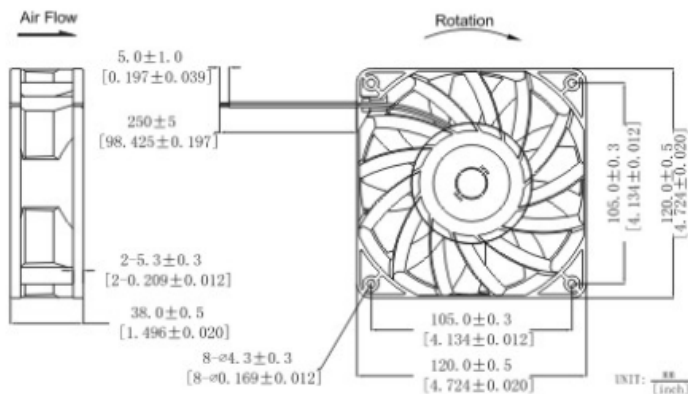

Performance

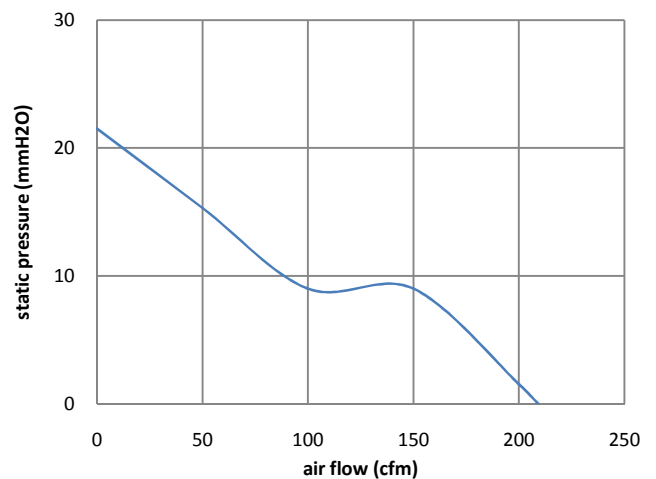

Ordering Code:

| Fan type | Dimensions | Voltage | Bearing type | | Speed | optional | | - | Electrical connections | | Other specs* |
|----------|------------|----------|--------------|--------|-------|----------|------------|---|------------------------|------------|--------------|
| | | | Ball | sleeve | | PWM | Tachometer | | Terminals | Lead wires | |
| FD | 1238 | 12/24/48 | B | NA | 40 | P | T | - | NA | L | /O |

*: if the ordered item is not standard fans offered on our website, always put "/O" at the end of the ordering code and specify the project number which is unique for any non-standard products. Sales team will provide this project number together with specs sheet confirmed by both parties.

Example: FD 1238 24 B 40-L