

## FD 1238H B 45 series

### Features

- UL 94V-0 plastic frame
- UL 94V-0 plastic impeller
- Ball bearing
- Lead wires
- Polarity protection
- Operating temp.: -20~+70 °C (ball bearing)
- 380 g




Model	Voltage VDC	Current A	Input Power (W)	Speed RPM	Airflow CFM	Static pressure (mmH2O)	Sound level dBA
FD 1238H 12 B 45	12	2.60	31.20	4500	234.65	27.20	64.6
FD 1238H 24 B 45	24	1.30	31.20	4500	234.65	27.20	64.6
FD 1238H 48 B 45	48	0.65	31.20	4500	234.65	27.20	64.6

#: B for ball bearing and S for sleeve bearing. Refer to the ordering code below.


\*: above specifications are subject to change without prior notice

\*\* : for non-standard product, contact our sale's team at [info@ventus-sa.com](mailto:info@ventus-sa.com)

### Dimensions

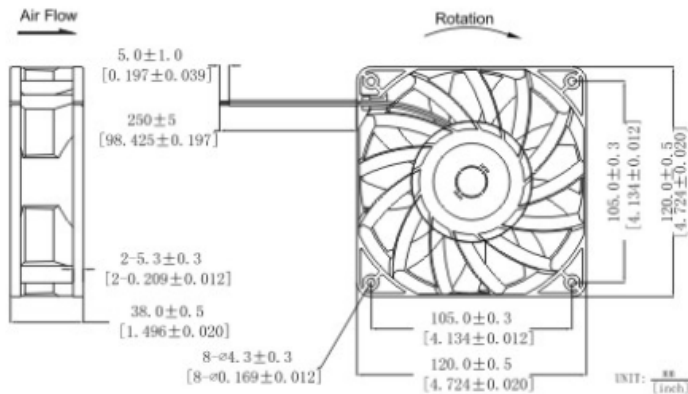

### Performance

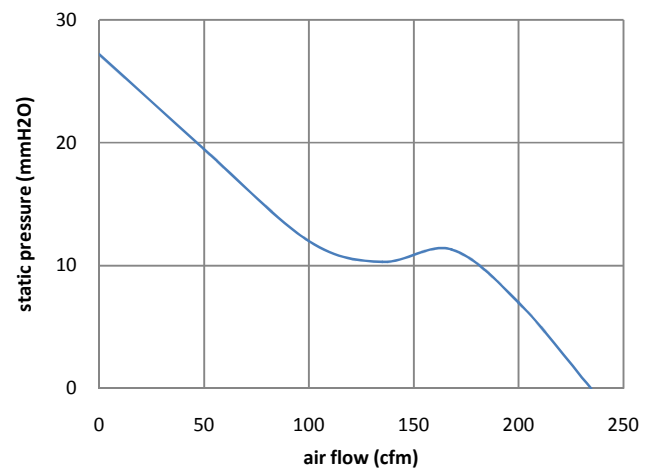

### Ordering Code:

Fan type	Dimensions	Voltage	Bearing type		Speed	optional		Electrical connections		Other specs*	
			Ball	sleeve		PWM	Tachometer	Terminals	Lead wires		
FD	1238	12/24/48	B	NA	45	P	T	-	NA	L	/O

\*: if the ordered item is not standard fans offered on our website, always put "/O" at the end of the ordering code and specify the project number which is unique for any non-standard products. Sales team will provide this project number together with specs sheet confirmed by both parties.

Example: FD 1238 24 B 45-L