

FD 25489 22 series

Φ254x89 mm

Features

- Aluminum frame
- UL 94V-0 thermoplastic impeller
- Ball bearing
- Lead wires
- Polarity protection*
- Optional functions: FG, RD, PWM
- Operating temp.: -10~+70 °C
- Storage temp.: -40~+70 °C
- 2410 g




Model	Voltage VDC	Current A	Input Power (W)	Speed RPM	Airflow CFM	Static pressure (mmH2O)	Sound level dBA
FD 25489 24 B 22	24	1.50	36.00	2200	758.11	18.54	61.2
FD 25489 48 B 22	48	0.75	36.00	2200	758.11	18.54	61.2

*: Circuit won't be burned within 5seconds when Vcc & GND are exchanged


** : above specifications are subject to change without prior notice

***: for non-standard product, contact our sale's team at info@ventus-sa.com

Dimensions

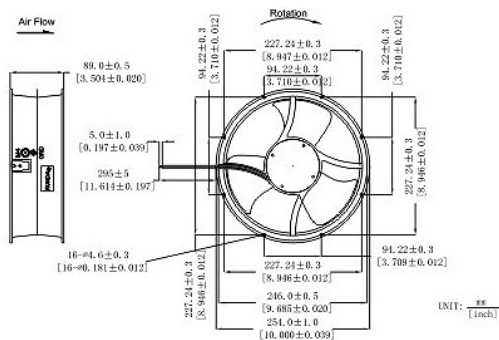

Performance

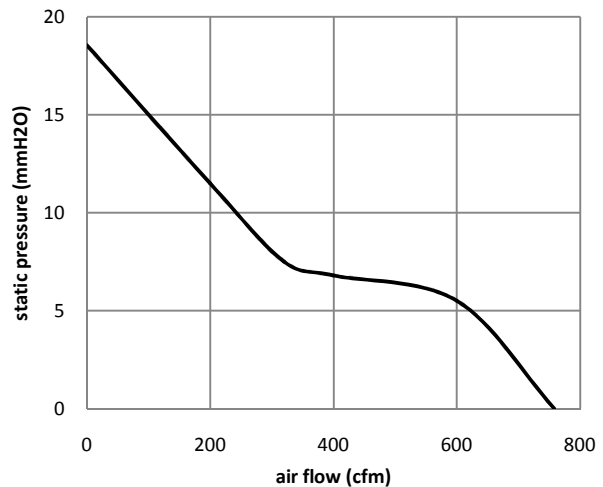

Ordering Code:

Fan type	Dimensions	Voltage	Bearing type		Speed	optional			-	Electrical connections		Other specs*
			Ball	sleeve		FG	RD	PWM		Terminals	Lead wires	
FD	25489	12/24/48	B	-	22	T	D	P	-	-	L	/O

*: if the ordered item is not standard fans offered on our website, always put "/O" at the end of the ordering code and specify the project number which is unique for any non-standard products. Sales team will provide this project number together with specs sheet confirmed by both parties.

Example: FD 25489 24 B 22-L