

FD 6015 40 series

60x60x15 mm

Features

- UL 94V-0 thermoplastic frame
- UL 94V-0 thermoplastic impeller
- Ball bearing
- Lead wires
- Polarity protection*
- Optional functions: FG, RD, PWM
- Operating temp.: -10~+70 °C
- Storage temp.: -40~+70 °C
- 28 g




Model	Voltage VDC	Current A	Input Power (W)	Speed RPM	Airflow cfm	Static pressure (mmH2O)	Sound level dBA
FD 6015 05 B 40	5	0.46	2.30	4000	18.97	2.99	31.5
FD 6015 12 B 40	12	0.19	2.28	4000	18.97	2.99	31.5
FD 6015 24 B 40	24	0.10	2.40	4000	18.97	2.99	31.5

*: Circuit won't be burned within 5seconds when Vcc & GND are exchanged


** : above specifications are subject to change without prior notice

***: for non-standard product, contact our sale's team at info@ventus-sa.com

Dimensions

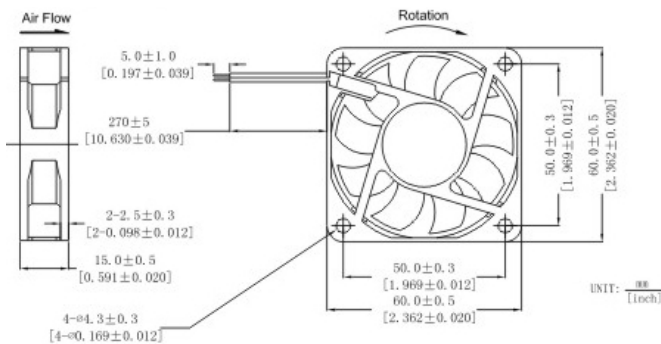

Performance

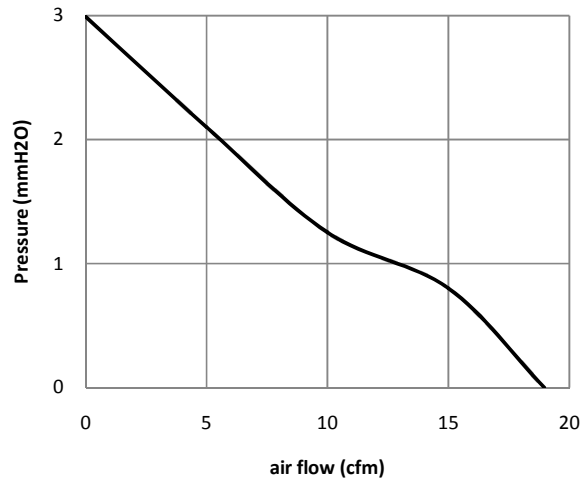

Ordering Code:

Fan type	Dimensions	Voltage	Bearing type		Speed	optional			Electrical connections		Other specs*	
			Ball	sleeve		FG	RD	PWM	Terminals	Lead wires		
FD	6015	05/12/24	B	-	40	T	D	P	-	-	L	/O

*: if the ordered item is not standard fans offered on our website, always put "/O" at the end of the ordering code and specify the project number which is unique for any non-standard products. Sales team will provide this project number together with specs sheet confirmed by both parties.

Example: FD 6015 24 B 40-L