

FD 7025 24VDC series

70x70x25 mm

Features

- UL 94V-0 thermoplastic frame
- UL 94V-0 thermoplastic impeller
- Ball bearing
- Lead wires
- Polarity protection*
- Optional functions: FG, RD, PWM
- Operating temp.: -10~+70 °C
- Storage temp.: -40~+70 °C
- 78 g




| Model | Voltage VDC | Current A | Input Power (W) | Speed RPM | Airflow cfm | Static pressure (mmH2O) | Sound level dBA |
|-----------------|-------------|-----------|-----------------|-----------|-------------|-------------------------|-----------------|
| FD 7025 24 B 35 | 24 | 0.12 | 2.88 | 3500 | 36.00 | 4.10 | 35.5 |
| FD 7025 24 B 40 | 24 | 0.16 | 3.84 | 4000 | 41.00 | 5.30 | 39.0 |
| FD 7025 24 B 45 | 24 | 0.18 | 4.32 | 4500 | 46.00 | 6.70 | 41.6 |
| FD 7025 24 B 50 | 24 | 0.20 | 4.80 | 5000 | 51.00 | 8.30 | 44.6 |

*: Circuit won't be burned within 5seconds when Vcc & GND are exchanged


** : above specifications are subject to change without prior notice

***: for non-standard product, contact our sale's team at info@ventus-sa.com

Dimensions

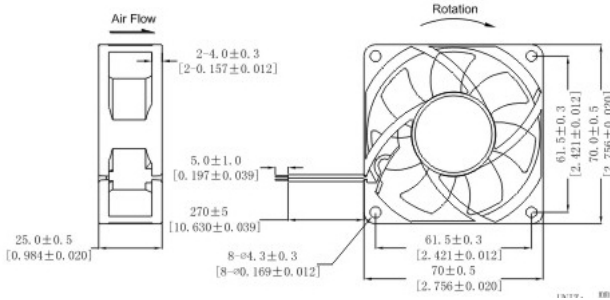

Performance

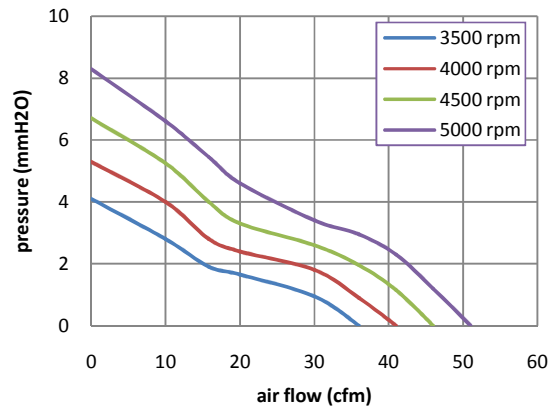

Ordering Code:

| Fan type | DC fans | Dimensions | Voltage | Bearing type | | Speed | optional | | | Electrical connections | | Other specs* | |
|----------|---------|------------|---------|--------------|--------|-------------|----------|----|-----|------------------------|------------|--------------|----|
| | | | | Ball | sleeve | | FG | RD | PWM | Terminals | Lead wires | | |
| FD | | 7025 | 24 | B | - | 35/40/45/50 | T | D | P | - | - | L | /O |

*: if the ordered item is not standard fans offered on our website, always put "/O" at the end of the ordering code and specify the project number which is unique for any non-standard products. Sales team will provide this project number together with specs sheet confirmed by both parties.

Example: FD 7025 24 B24-L