

## FC 1238 W B series

120x120x38 mm

- magnesium alloy die cast frame
- UL94V-0 plastic impeller
- bearing: ball bearing
- operating temp.: -20~+80 °C
- life time: 60000 hrs@20 °C
- wide voltage range
- motor: electronically commutated motor
- ingress protection: IP 54
- unit weight ~ 370 g
- approval: CE




model	voltage VAC	frequency Hz	power W	speed rpm	air flow cfm	static pressure Inch-H2O	sound level dBA
FC 1238 W B 28	90~264	50~60	6	2800	84	0.28	43
FC 1238 W B 32	90~264	50~60	8	3200	100	0.34	47
FC 1238 W B 36	90~264	50~60	10	3600	120	0.39	52
FC 1238 W B 40	90~264	50~60	12	4000	140	0.44	56

\*: Contact Ventus sales team for the product availability with different air flow.

\*\*: Specifications listed above are subject to change without prior notice.

### dimensions

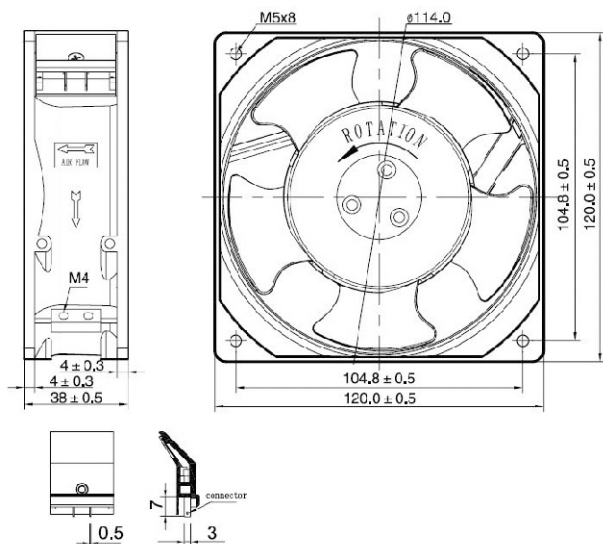

### performance curves

