

FC 1751 series

172x150x51 mm

- magnesium alloy die cast frame
- UL94V-0 plastic impeller
- bearing: ball bearing
- operating temp.: -20~+80 °C
- life time: 60000 hrs@20 °C
- motor: electronically commutated motor
- ingress protection: IP 54
- unit weight ~ 666 g
- approval: CE




model	voltage VAC	frequency Hz	power W	speed rpm	air flow cfm	static pressure Inch-H2O	sound level dBA
FC 1751 # B 28M	115/230	50/60	10	2800	210	0.48	50
FC 1751 # B 32M	115/230	50/60	16	3200	235	0.55	53
FC 1751 # B 36M	115/230	50/60	22	3600	260	0.63	56
FC 1751 # B 40M	115/230	50/60	29	4000	290	0.70	61

#: #=11: 115 VAC supply, #=23: 230 VAC supply

*: Contact Ventus sales team for the product availability with different air flow.

** : Specifications listed above are subject to change without prior notice.

dimensions

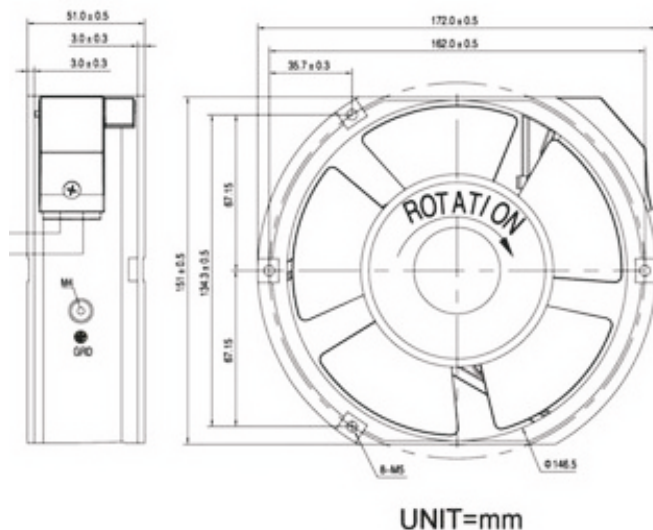

performance curves

