

FC 8025 W B 7B series

80x80x25 mm

- magnesium alloy die cast frame
- UL94V-0 plastic impeller
- bearing: ball bearing
- operating temp.: -20~+80 °C
- life time: 60000 hrs@20 °C
- wide voltage range
- electronically commutated motor
- ingress protection: IP 54
- unit weight ~ 175 g
- approval: CE




model	voltage VAC	frequency Hz	power W	speed rpm	air flow cfm	static pressure Inch-H2O	sound level dBA
FC 8025 W B 30 7B	90~264	50~60	3	3000	38	0.14	31
FC 8025 W B 35 7B	90~264	50~60	3.5	3500	43	0.18	36
FC 8025 W B 40 7B	90~264	50~60	4	4000	48	0.21	40
FC 8025 W B 45 7B	90~264	50~60	5	4500	53	0.25	45

*: Contact Ventus sales team for the product availability with different air flow.

** : Specifications listed above are subject to change without prior notice.

dimensions

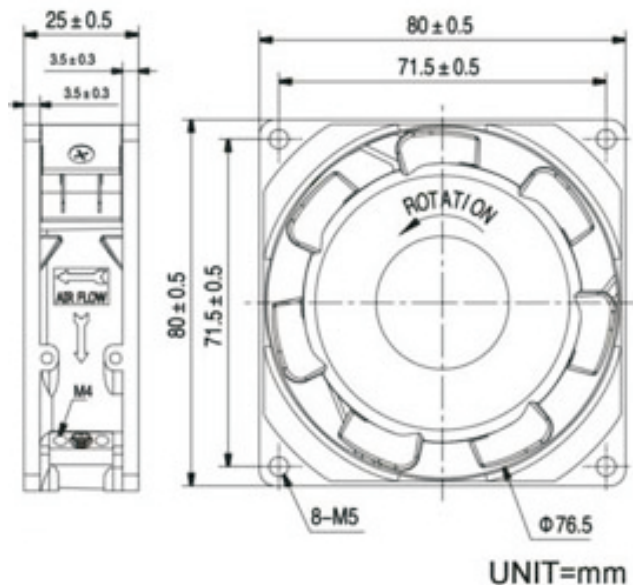

performance curves

