

FC 9238 B 36

92x92x38 mm

Features

- Frame: Thermoplastic PBT UL 94V-0
- Impeller: Thermoplastic PBT UL 94V-0
- Ball bearing
- Lead wires or terminals
- Operating temp.: -20~+75 °C
- Electrical commutated motor
- 198 g
- CE




Model	Voltage VAC	Frequency Hz	Input Power (W)	Speed RPM	Airflow CFM	Static Pressure (mmH2O)[inH2O]	Sound Level dBA
FC 9238 11 B 30	115 (80-120)	45-65	4.6	3600	78.95	8.19 [0.32]	42.5
FC 9238 23 B 30	220 (120-240)	45-65	4.6	3600	78.95	8.19 [0.32]	42.5


*: above specifications are subject to change without prior notice

**: for non-standard product, contact our sale's team at info@ventus-sa.com

Dimensions

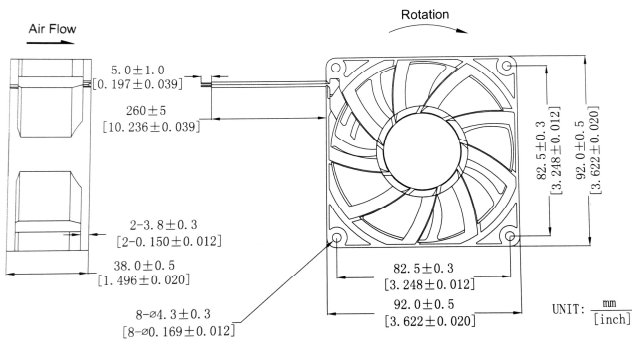

Performance

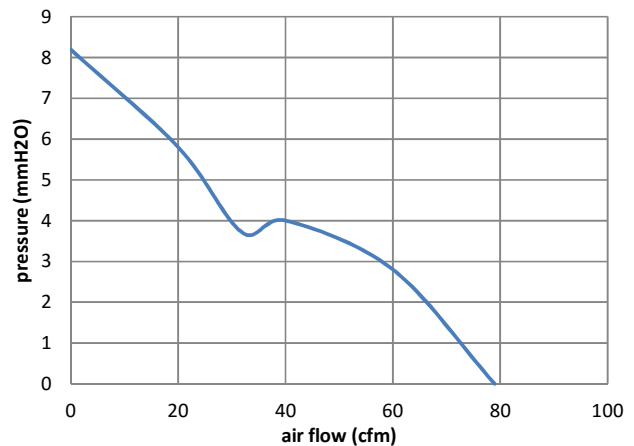

Ordering Code:

Fan type	Dimensions	Voltage	Bearing type		Speed	-	Electrical connections		Other specs*
			Ball	sleeve			Terminals	Lead wires	
FC	9238	11/23	B	NA	36	-	C	L	/O

*: if the ordered item is not standard fans offered on our website, always put "/O" at the end of the ordering code and specify the project number which is unique for any non-standard products. Sales team will provide this project number together with specs sheet confirmed by both parties.

Example: FC 9238 23 B 36-L